

River's Edge Fabric Company

Block of the Month = August 2009


Use a SCANT 1/4" seam allowance

Fabric 1
Two – 4" squares


Fabric 2
Six – 4" squares

Background Fabric
Eight – 4" squares



Draw a diagonal line on the wrong side of two of the background squares. Place right sides together with the Fabric 1 squares; sew a scant 1/4" from the drawn line, cut apart on the line, open and press. Trim to 3 1/2".




Draw a diagonal line on the wrong side of the remaining background squares. Place right sides together with the Fabric 2 squares; sew a scant 1/4" from the drawn line, cut apart on the line, open and press. Trim to 3 1/2".



Sew the half square triangles into rows.

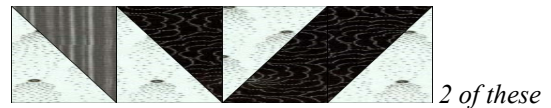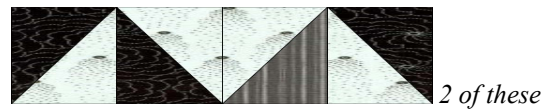

Sew rows together to complete block.

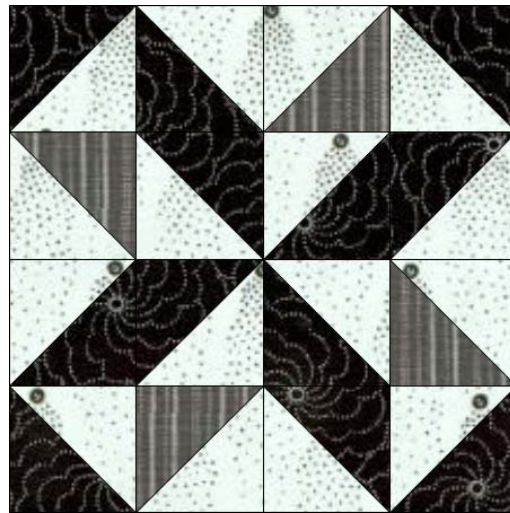

Block should measure 12 1/2".